


1. 用电脑连接模块 lan 口进入网页
2. 选择 Operation Mode——Bridge——AP Client 选择 Enable 选择开启，点击 Apply 提交

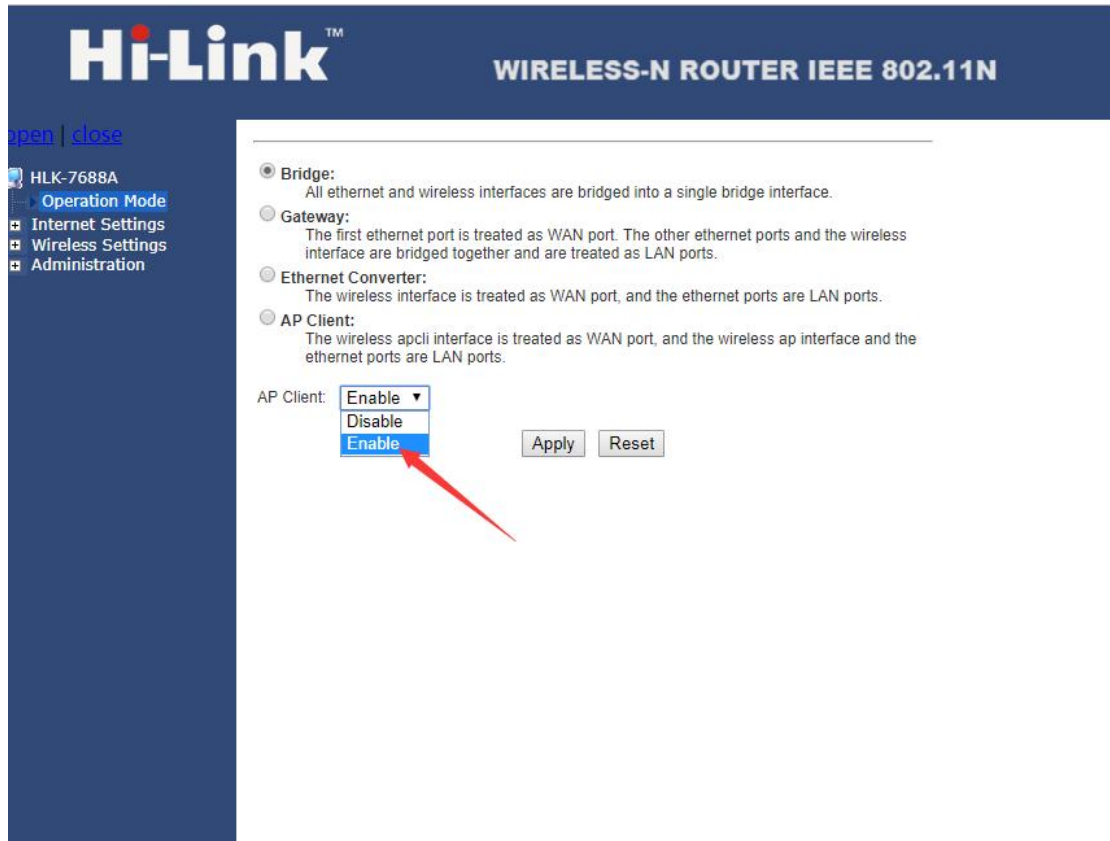

3. 进入 lan 口关闭 DHCP 服务，修改 IP Address 为上级路由的网段，Default Gateway 和上级路由相同，参数设置完后点击 Apply 提交参数

**Hi-Link™** WIRELESS-N ROUTER IEEE 802.11N

open | close

- HLK-7688A
  - Operation Mode
  - Internet Settings
    - LAN**
    - VPN Passthrough
    - IPv6
  - Wireless Settings
  - Administration

LAN Interface Setup	
Hostname	Mediatek
IP Address	192.168.0.123
Subnet Mask	255.255.255.0
LAN2	<input type="radio"/> Enable <input checked="" type="radio"/> Disable
LAN2 IP Address	
LAN2 Subnet Mask	
Default Gateway	192.168.0.1
Primary DNS Server	168.95.1.1
Secondary DNS Server	8.8.8.8
MAC Address	40:D6:3C:1E:0E:5E
DHCP Type	Disable
802.1d Spanning Tree	Disable
LLTD	Disable
IGMP proxy	Disable
UPNP	Disable
Router Advertisement	Disable
DNS proxy	Enable

Apply Cancel

4. 电脑设置静态同网段进网页，进入 AP Client 栏，输入上级路由的名称、加密方式密码，设置完成后点击 Apply 提交

**Hi-Link™ WIRELESS-N ROUTER IEEE 802.11N**

open | close

- HLK-7688A
  - Operation Mode
  - Internet Settings
  - Wireless Settings
    - Basic
    - Advanced
    - Security
    - WPS
    - AP Client**
    - Station List
    - Statistics
  - Administration

### AP Client Feature

You could configure AP Client parameters here.

AP Client Parameters	
SSID	TP-LINK_6D85
MAC Address (Optional)	
Security Mode	WPA2PSK ▼
Encryption Type	AES ▼
Pass Phrase	12345678

Apply Cancel SCAN

Site Survey							
Ch	SSID	BSSID	Security	Signal(%)	W-Moe	ExtCh	NT
1	shequpintuan	4c:d1:a1:c4:fe:cc	WPA2PSK/AES	34	11b/g/n	ABOVE	In
1	XR750-E19B20	88:12:4e:e2:36:02	WPA2PSK/AES	34	11b/g/n	NONE	In
1	Hi-Link17	1c:88:79:55:45:1e	WPA1PSKWPA2PSK/AES	100	11b/g/n	NONE	In
1	TP-LINK_6D85	dc:fe:18:e2:6d:85	WPA1PSKWPA2PSK/AES	100	11b/g/n	ABOVE	In
1	HI-LINK_5F9A	e0:b9:4d:87:5f:9a	WPA2PSK/AES	50	11b/g/n	NONE	In
1	DIRECT-D6XIAO-PCmsUJ	62:57:18:d7:ad:2a	WPA2PSK/AES	18	11b/g/n	NONE	In
1	HI-LINK-0016	8c:88:2b:00:00:14	WPA1PSKWPA2PSK/AES	89	11b/g/n	NONE	In
1		00:9a:cd:81:1a:ed	WPA2PSK/AES	70	11b/g/n	ABOVE	In
1	00123	28:f3:66:b7:18:40	WPA1PSKWPA2PSK/AES	42	11b/g/n	NONE	In
1	K3LW_59A1	e0:b9:4d:c4:59:a0	WPA1PSKWPA2PSK/AES	70	11b/g/n	NONE	In

5. 所有参数设置成功后，使用网线连接电脑和模块 lan 口，或连接模块 wifi 即可上网。

QQ音乐, 千万高品质曲库

表

时长

06:45

00:13 / 06:45



## 连接

 TP-LINK\_6D85  
已连接

## WLAN 2

 HI-LINK\_0E5F  
已连接

 TP-LINK\_6D85

 360WiFi-BB

 OpenWrt

 adam

 Hi-Link17

 F797

 HI-LINK\_F669